

2372
SERIES

QUALITY
HPP

Hollow Block Hammer Drill Bit 2 Cutting Edges Compatible SDS+

Specially designed to drill through hollow bricks and hollow blocks without damaging wall.

Allows to make quality holes that make the anchors more reliable.



NOT DAMAGED WALL = OPTIMIZED ANCHORING

FEATURES

- Semi positive tip.
- Tip angle 130
- Micro percussion system.
- Long pitch.
- Impact reducer.

BENEFITS

- Hollow block wall is not damaged.
- Perfectly round and calibrated hole.
- Increases the strength of the anchors.
- Drill bit stay in the drilling axis.
- Drilling through in sulations.

APPLICATIONS

- Anchoring in hollow block.



Item Number	Diameter (mm)	Working Length (mm)	Overall Length (mm)	Item Number	Diameter (mm)	Working Length (mm)	Overall Length (mm)	Item Number	Diameter (mm)	Working Length (mm)	Overall Length (mm)	Item Number	Diameter (mm)	Working Length (mm)	Overall Length (mm)
2372.040160	4	110	160	2372.160210	16	160	210	2372.090350	9	300	350	2372.060550	6	500	550
2372.050160	5	110	160	2372.050260	5	210	260	2372.100350	10	300	350	2372.065550	6.5	500	550
2372.055160	5.5	110	160	2372.055260	5.5	210	260	2372.110350	11	300	350	2372.070550	7	500	550
2372.060160	6	110	160	2372.060260	6	210	260	2372.120350	12	300	350	2372.080550	8	500	550
2372.065160	6.5	110	160	2372.065260	6.5	210	260	2372.130350	13	300	350	2372.090550	9	500	550
2372.070160	7	110	160	2372.070260	7	210	260	2372.140350	14	300	350	2372.100550	10	500	550
2372.080160	8	110	160	2372.080260	8	210	260	2372.160350	16	300	350	2372.110550	11	500	550
2372.090160	9	110	160	2372.090260	9	210	260	2372.050410	5	360	410	2372.120550	12	500	550
2372.100160	10	110	160	2372.100260	10	210	260	2372.055410	5.5	360	410	2372.130550	13	500	550
2372.110160	11	110	160	2372.110260	11	210	260	2372.060410	6	360	410	2372.140550	14	500	550
2372.120160	12	110	160	2372.120260	12	210	260	2372.065410	6.5	360	410	2372.160550	16	500	550
2372.130160	13	110	160	2372.130260	13	210	260	2372.070410	7	360	410	2372.060600	6	550	600
2372.140160	14	110	160	2372.140260	14	210	260	2372.080410	8	360	410	2372.065600	6.5	550	600
2372.160160	16	110	160	2372.160260	16	210	260	2372.090410	9	360	410	2372.070600	7	550	600
2372.040180	4	130	180	2372.050310	5	260	310	2372.100410	10	360	410	2372.080600	8	550	600
2372.050180	5	130	180	2372.055310	5.5	260	310	2372.110410	11	360	410	2372.090600	9	550	600
2372.055180	5.5	130	180	2372.060310	6	260	310	2372.120410	12	360	410	2372.100600	10	550	600
2372.060180	6	130	180	2372.065310	6.5	260	310	2372.130410	13	360	410	2372.110600	11	550	600
2372.065180	6.5	130	180	2372.070310	7	260	310	2372.140410	14	360	410	2372.120600	12	550	600
2372.080180	8	130	180	2372.080310	8	260	310	2372.160410	16	360	410	2372.130600	13	550	600
2372.100180	10	130	180	2372.090310	9	260	310	2372.050460	5	410	460	2372.140600	14	550	600
2372.050210	5	160	210	2372.100320	10	260	310	2372.055460	5.5	410	460	2372.160600	16	550	600
2372.055210	5.5	160	210	2372.110310	11	260	310	2372.060460	6	410	460	2372.160600	16	550	600
2372.060210	6	160	210	2372.120310	12	260	310	2372.065460	6.5	410	460	2372.080800	8	750	800
2372.065210	6.5	160	210	2372.130310	13	260	310	2372.070460	7	410	460	2372.100800	10	750	800
2372.070210	7	160	210	2372.140310	14	260	310	2372.080460	8	410	460	2372.110800	11	750	800
2372.080210	8	160	210	2372.160310	16	260	310	2372.090460	9	410	460	2372.120800	12	750	800
2372.090210	9	160	210	2372.050350	5	300	350	2372.100460	10	410	460	2372.130800	13	750	800
2372.100210	10	160	210	2372.055350	5.5	300	350	2372.110460	11	410	460	2372.149800	14	750	800
2372.110210	11	160	210	2372.060350	6	300	350	2372.120460	12	410	460	2372.160800	16	750	800
2372.120210	12	160	210	2372.065350	6.5	300	350	2372.130460	13	410	460				
2372.130210	13	160	210	2372.070350	7	300	350	2372.140460	14	410	460				
2372.140210	14	160	210	2372.080350	8	300	350	2372.160460	16	410	460				

ZHEN JIANG HTT TOOL CO., LTD.



86-511-86906019



market@htt-tools.com



throwindustry



www.htt-tools.com



RM2009, Office Building B, Wuyue Square
Economic Development Zone
Danyang City, Jiangsu Province, China 212300



[PLANT ADDRESS]
Xing Long Village, Yao Qiao Town, New District
Zhen Jiang City, Jiang Su Province, China 212135



Drilling ...


The wall is intact, and keeps its original thickness of 16mm.

Test of tearing for a chemical fixing ...

The fixation resists perfectly.

It is the wall which gives in.

Break in 700 kg.

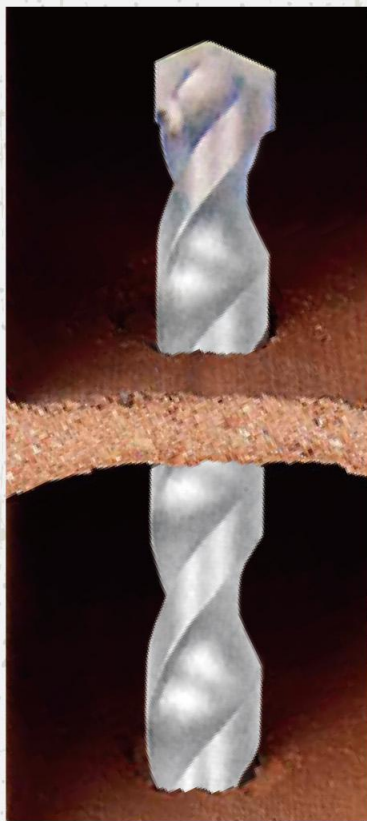

EFFICIENT IN ALL HOLLOW BLOCKS OF THE MARKET

Slap, breeze block, breeze block Easytherm®, Rubbe, hollow brick, brick for bonding, brick pole, brick rabbit Wienerberger®, plank, brick of arase...

HTT developed specially a bit to drill hollow blocks without degrading walls.

This special drill bit for hollow blocks allows to realize qualitative holes which enhance reliability of the anchorings.